


Rtd Process Style

Class 121 – Moderate, High and Full Temp Range

Spring Loaded Rtd

1/4", CRIMPED TWIN THREADED HEX FITTING, FOR THERMOWELL APPLICATIONS

121 Rtd Process Style, Spring Loaded, Crimped Twin Threaded Hex Fitting, Non-Sealed							
Code	Temperature Range						
M	Moderate Temp Range = -50 to 250C (-58 to 482F)						
H	High Temp Range = -50 to 500C (-58 to 932F)						
F	Full Temp Range = -200 to 500C (-328 to 932F)						
Code	Accuracy						
P2A	Platinum, 100 Ohms ±.06%, .00385 Temperature Coefficient						
P2B	Platinum, 100 Ohms ±.12%, .00385 Temperature Coefficient						
P2C	Platinum, 100 Ohms ±.5%, .00385 Temperature Coefficient						
Code	Element Configuration						
3S	Three Wire Single (color code: red(2)/white)						
4S	Four Wire Single (color code: red(2)/white(2))						
3D	Three Wire Dual (color code: white/red(2)/black/green(2))						
Code	'L' Immersion Length						
000	Specify Length in inches (example: 125 = 12.5 inches) Note: Minimum 1.5" and Maximum 36"						
Code	Connection Head						
N	No Connection Head						
A	Stainless Steel						
B	Aluminum						
C	Polypropylene						
D	Cast Iron						
E	Explosion Proof Stainless Steel						
F	Explosion Proof Aluminum						
G	Small Stainless Steel						
Code	Additional Options						
N	No Options						
T	Transmitter						
W	Leadwire Options						
121	M					Enter Desired Part Number Here	
121	M	P2B	3S	125	B	N	Example Part Number

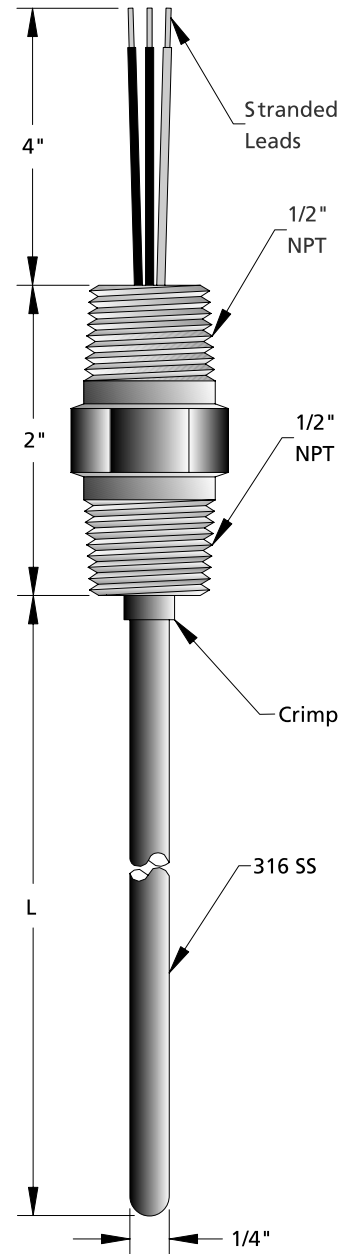

See Leadwire Configuration Section for Lead Options		
Typical Catalog number with leadwire options.		
121MP2B3S095BW	/	670004A004A
Catalog Number		Leadwire Option Code